


- 4CH analog video input, compatible with 5MP/4MP/1080p/720p AHD camera and CVBS input
- 2CH IPC input, compatible with 5MP/4MP/3MP/1080p/720p camera
- 1 SATA HDD, up to 8TB per HDD
- H.265/ H.264 video compression
- Video management with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones



Unit: mm

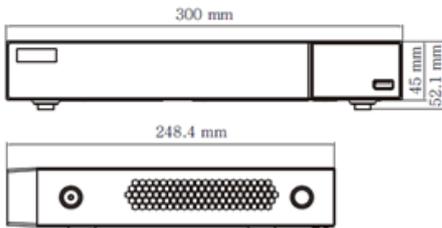

Model JN6504-S

VIDEO INPUT	ANALOG CAMERA	Compatible with 5MP / 4MP / 1080P / 720P AHD camera and CVBS input
	NO. OF CHANNEL	BNC x 4
VIDEO OUTPUT	IP CAMERA	Compatible with 5MP / 4MP / 3MP / 1080P / 720P IP camera
	NO. OF CHANNEL	2
AUDIO	DIGITAL VIDEO	1 channel 1920x1080 / 1280x1024 / 1024x768
	VGA	1 channel, 1920x1080 / 1280x1024 / 1024x768
	BNC	CVBS (used as the main or spot output)
RECORDING	INPUT	RCA x 4
	OUTPUT	RCA x 1
COMMUNICATION	IP CAMERA AUDIO INPUT	2
	COMPRESSION	H.265 / H.264
EVENT HANDLING	MODE	Manual, Schedule, Motion, Event-driven
	HDD TYPE	SATA x1 (Max. 8TB per HDD)
POWER	MAX. RECORDING PERFORMANCE	Normal: 1080P@12fps(PAL) / 15fps (NTSC) 720P@25fps (PAL) / 30fps (NTSC) CVBS WD1@25fps (PAL) / 30fps (NTSC)
	PLAYBACK	Lite mode: 5MP Lite(1280x1936)@10fps, 4MP Lite(1280x1440)@12fps(PAL) / 15fps (NTSC), 1080 P Lite(960x1080)@25fps (PAL) / 30fps (NTSC)
OPERATING ENVIRONMENT	NETWORK	4CH playback; Play, Forward, Backward, Pause, Digital zoom, etc.
	CONCURRENT USER	RJ45 100Mbps x 1
MECHANICAL DESIGN	WEB SERVER	5
	RS485	Built-in
MECHANICAL DESIGN	USB	RS485 x1, connect to PTZ or keyboard
	EVENT TYPE	USB2.0 x 2
MECHANICAL DESIGN	ACTION TYPE	Video motion detection, External alarm, Video loss
	ALARM INPUT	Recording, Snap, Email, Preset
MECHANICAL DESIGN	RELAY OUTPUT	4
	VOLTAGE	1
MECHANICAL DESIGN	POWER SUPPLY	DC 12V
	MAX. RATING	DC12V /2A
MECHANICAL DESIGN	AMBIENT TEMPERATURE	≤ 10W (without HDD)
	RELATIVE HUMIDITY	-10°C - 50°C
MECHANICAL DESIGN	DIMENSION	10% - 90%
	WEIGHT	300mm (W) x 260mm (D) x 52mm (H)
MECHANICAL DESIGN		1.08kg

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.