





### Features

- 4K IR Bullet
- 1/2.5" 8MP SONY CMOS sensor
- Max. resolution: 3840 x 2160
- H.265 / Enhanced H.264 compression
- Electric vari-focal f=3.3mm ~ 12mm lens
- Angle of view: 97.5° ~ 38.5°
- 30-50M IR illumination range
- IP66 Weather proof
- Power over Ethernet
- ONVIF Profile S

### Dimension

Unit: mm

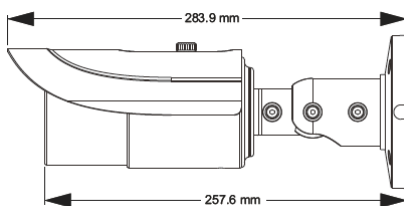

### Specifications

MODEL		MP877AE-HD
VIDEO	IMAGE SENSOR	1/2.5" 8MP SONY CMOS
	RESOLUTION	8MP ( 3840×2160 ), 1080P ( 1920×1080 ), 720P ( 1280×720 ), D1, CIF, 480x240
	FRAME RATE	Up to 25/30fps
	MINIMUM ILLUMINATION	0.01 lux @F1.2, AGC ON; 0 lux with IR
	IR Distance	30~50M
	LENS	f=3.3mm ~ 12mm motorized lens
	ANGLE OF VIEW	97.5° ~ 38.5°
	ELECTRONIC SHUTTER	1 / 25s ~ 1 / 100000s
	VIDEO SETTINGS	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc.
	ANALOG VIDEO OUTPUT	CVBS video output ( BNC × 1 )
AUDIO	INPUT	1CH
	OUTPUT	1CH
CONNECTIVITY	NETWORK INTERFACE	RJ45 × 1, 10M / 100M self-adaption
	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	CONCURRENT USERS	10
	WEB SERVER	Built-in
	ONVIF	Profile S
COMPRESSION	VIDEO COMPRESSION	H.265 / Enhanced H.264
	VIDEO STREAMING	3 Independent Streams
	MOTION DETECTION	Yes
	ACTION	Snap, Recording, Alarm output, Email
	ALARM INPUT	1
	ALARM OUTPUT	1
EDGE RECORDING	TF Card	Max. 128GB
POWER	VOLTAGE	12VDC
	MAX. RATING	8W
	POE	YES
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-20°C ~ 50°C
	RELATIVE HUMIDITY	10%-90%
MECHANICAL DESIGN	WEATHER PROOF	IP66
	DIMENSION	Φ109mm× 284mm
	WEIGHT	1200g

**TeleEye Group**  
Hong Kong China Malaysia Philippines  
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

[www.TeleEye.com](http://www.TeleEye.com)