

MQ6231-HD

30 x Optical Zoom 4MP Network IR Speed Dome


- 1/2.5" 4MP Progressive CMOS Sensor
- Max. Resolution: 2560x1440 @20/30fps
- 30x Optical Zoom
- 100M IR Distance
- H.265 / Enhanced H.264 Compression
- IP66 Weather Proof
- TVS 6KV Lightning Protection, Surge Protection



Model

MQ6231-HD

Unit: mm

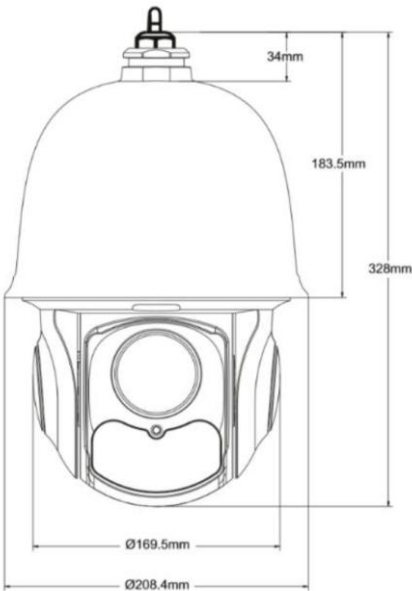

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2021 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, US, and other countries. All other trademarks are the property of their respective owners.

VIDEO	IMAGE SENSOR	1/2.5" 4MP Progressive CMOS
	MAX. RESOLUTION	2560 × 1440
	FRAME RATE	Up to 30fps
	MINIMUM ILLUMINATION	Color 0.01Lux @ (F1.5 AGC ON); B/W 0.002Lux @ (F1.5 AGC ON); 0.0Lux, IR ON; ~100M IR distance
	LENS	30x Optical zoom, f=4.7mm ~141mm, F1.6~F4.4
	VIEW ANGLE	62.5° ~ 2.1°
	ELECTRONIC SHUTTER	Auto/ Manual (1/1~1/100000s)
AUDIO	INPUT	1CH
	OUTPUT	1CH
FUNCTION	PAN RANGE	360° endless rotation
	PAN SPEED	Preset speed: 150°/s; Manual control speed: 0.1 ~ 80°/s
	TILT RANGE	-3° ~ 93°
	TILT SPEED	Preset speed: 120°/s; Manual control speed: 0.1 ~ 80°/s
	PRESET	360
	CRUISE	8
	TRACK	4
	TIME TASK	8
	SCAN	2
	HOME POSITION	Yes
CONNECTIVITY	OSD MENU	English
	NETWORK INTERFACE	RJ-45
	NETWORK PROTOCOL	HTTP, HTTPS, IPv4/IPv6, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE
	WEB SERVER	Built-in
COMPRESSION	ONVIF	Profile S
	VIDEO COMPRESSION	H.265 / Enhanced H.264
	VIDEO STREAMING	3
EVENT HANDLING	ALARM INPUT	1
	ALARM OUTPUT	1
EDGE RECORDING	TF CARD	Max. 128GB
	POE	PoE+ (802.3.at, class3)
POWER	POWER SUPPLY	DC24V / 2500mA
	MAX. RATING	30W (IR on)
	AMBIENT TEMPERATURE	-30°C ~ 60°C
OPERATING ENVIRONMENT	RELATIVE HUMIDITY	≤ 95%
	WEATHER PROOF	IP66
MECHANICAL DESIGN	PROTECTION LEVEL	TVS 6KV lightning protection, surge protection
	DIMENSION	209 x 328mm
	WEIGHT	3.8Kg